



COMPACT AIR CONDITIONING SYSTEM

BREEZONIC SLIM & BREEZONIC SLIM PLUS

The new Breezonic Slim Air Conditioning Systems with Heat Pump function are compact and state-of-the-art roof top units for campervans, motorhomes and caravans. The innovative inverter technology ensures exceptionally quiet, constant operation and low energy consumption thanks to the speed-controlled compressor. Developed for maximum efficiency, with eight operating modes, fitting perfectly with your individual comfort needs.

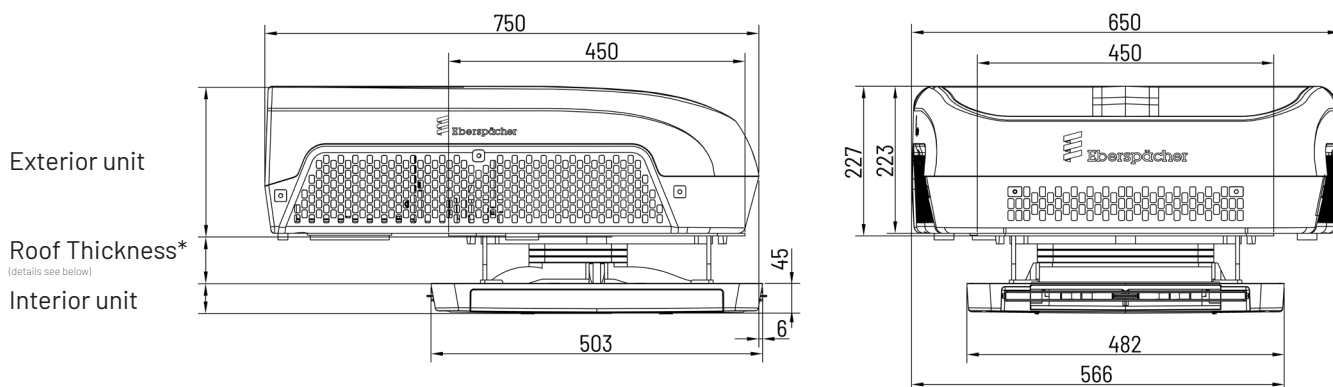
Two versions available: the Breezonic Slim provides 1.7 kW cooling and 1.8 kW heating capacity. The more powerful model Breezonic Slim Plus provides 2.3 kW cooling and 2.4 kW heating capacity. Both models are available with a black and white cover and as cooling only (AC) variants.

PRODUCT BENEFITS:

- Very compact and powerful air conditioning and heat pump units
- Exceptionally quiet operation and low energy consumption thanks to the variable speed compressor
- Very low starting current with smooth, soft ramp-up
- Extremely robust design: resistant to hail and branches
- Very compact dimensions and ultra-flat design
- Night mode for extremely quiet operation during sleep
- Eco mode for low energy consumption
- Very fast interior cooling via the Turbo Cooling function

OTHER FEATURES:

- Multiple control options: touch screen on interior panel (ADB), remote control, App (via Bluetooth) or central HMI
- Very slim, stylish interior panel design with integrated, dimmable LED lighting and the option of warm or cool white
- Multiple operating modes: Heating, Cooling, Automatic, Timer, Turbo, Eco, Dehumidification, Fan only, three fan-speed settings
- Operating temperature range: -7 to +52 °C
- Two units can be controlled simultaneously in a group or individually in the app or via EasyStart Touch
- Available in white or black
- Available as Heat Pump (HP) and Cooling Only (AC) versions

SEGMENTS: 

TECHNICAL DATA:

BREEZONIC		BREEZONIC SLIM HP	BREEZONIC SLIM AC	BREEZONIC SLIM PLUS HP	BREEZONIC SLIM PLUS AC
Voltage	V	230 V AC / 50 Hz			
Cooling performance	W	1,700		2,300	
Heating performance	W	1,850	-	2,400	-
Weight Rooftop / Air Distribution Box (ADB)	kg	28.00 / 2.35	27.00 / 2.35	29.00 / 2.35	28.50 / 2.35
Current rated cooling	A	3.95		4.45	
Current rated heating		4.50	N/A	4.55	N/A
Max. airflow	m³/h	500			
Refrigerant		R32			
Dimensions of roof unit (L x W x H)	mm	750 x 650 x 225			
Dimensions of interior unit (L x W x H)	mm	503 x 482 x 45			
Hatch / Roof openings	mm	400 x 400 / 360 x 360			
Roof thickness (standard)*	mm	25 - 75			
Roof thickness (with additional kit)*	mm	75 - 105			
Communication interfaces		Bluetooth (app) & CI- Bus, RV-C			
Control unit		Control via app, on-device touch display, remote control (as optional accessory)			
Part number black unit	●	29 0218 41 0104	29 0218 41 0204	29 0218 41 0103	29 0218 41 0203
Part number white unit	○	29 0218 41 0102	29 0218 41 0202	29 0218 41 0101	29 0218 41 0201
Part number Air Distribution Box (ADB)	○	29 0218 12 0001			
Part number remote control**		29 0248 27 0001			

**Additional accessories such as the return air grille and EasyStart Touch available on request